



Weather Protective Enclosure Dimensions on a UL Listed Integral Fuel Tank Base

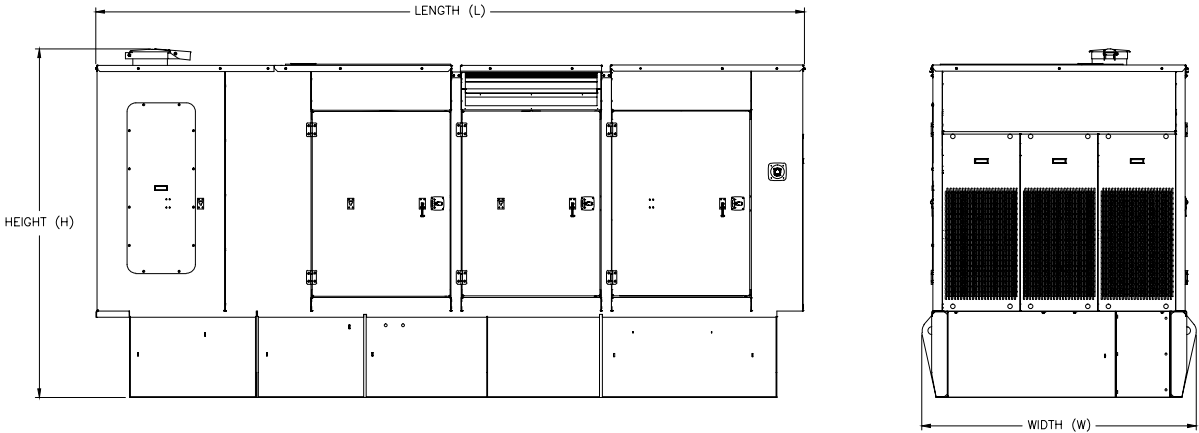


Model	Standby kW	Length "L"		Width "W"		Height "H"	
		mm	in	mm	in	mm	in
C13	350	5461	215.0	2014	79.3	2743	108.0
	400						
C15	350	4948	194.8	2014	79.3	2619	103.0
	400						
	450						
	500						
C18	550	5183	204.0	2014	79.3	2561	101.0
	600						

Weather Protective Enclosure Dimensions on a UL Listed 660 Gallon Sub-Base Fuel Tank Base

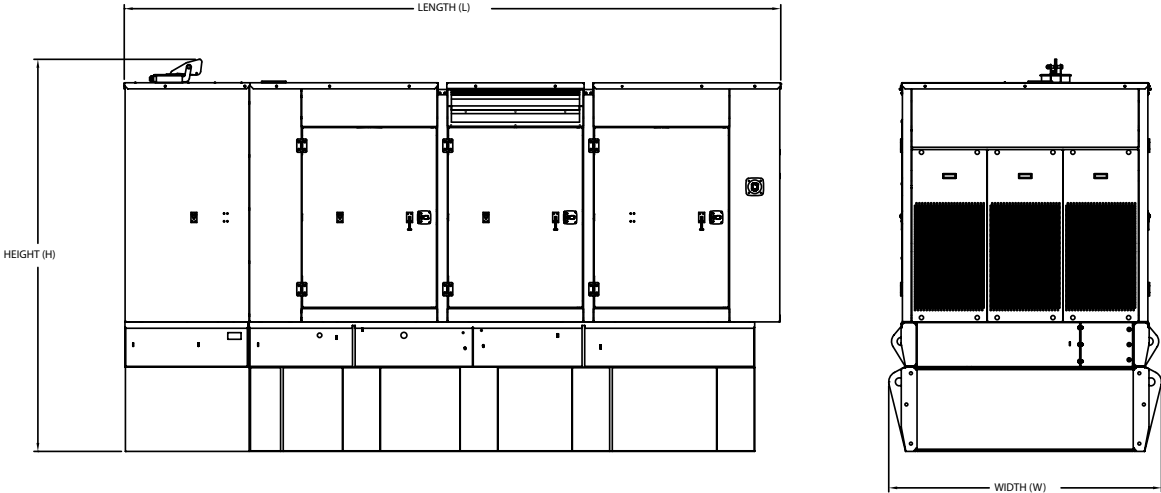


Model	Standby ekW	Length "L"		Width "W"		Height "H"	
		mm	in	mm	in	mm	in
C13	350	4948	194.8	2056	80.9	2955	116.3
	400						
C15	350	4948	194.8	2056	80.9	2955	116.3
	400						
	450						
	500						
C18	550	5184	204.1	2056	80.9	2897	114.1
	600						

Weather Protective Enclosure Dimensions on a UL Listed 1000 Gallon Sub-Base Fuel Tank Base

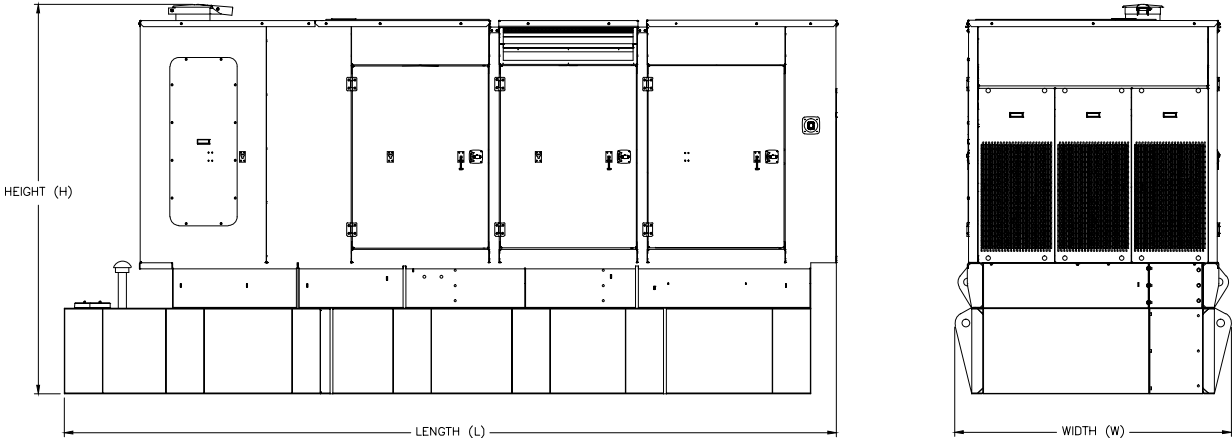

Model	Standby kW	Length "L"		Width "W"		Height "H"	
		mm	in	mm	in	mm	in
C13	350	5751	226.4	2056	80.9	2955	116.3
	400						
C15	350	5751	226.4	2056	80.9	2955	116.3
	400						
	450						
	500						
C18	550	5747	226.3	2056	80.9	2897	114.1
	600						

Weather Protective Enclosure Dimensions on a UL Listed 1900 and 2200 Gallon Sub-Base Fuel Tank Base

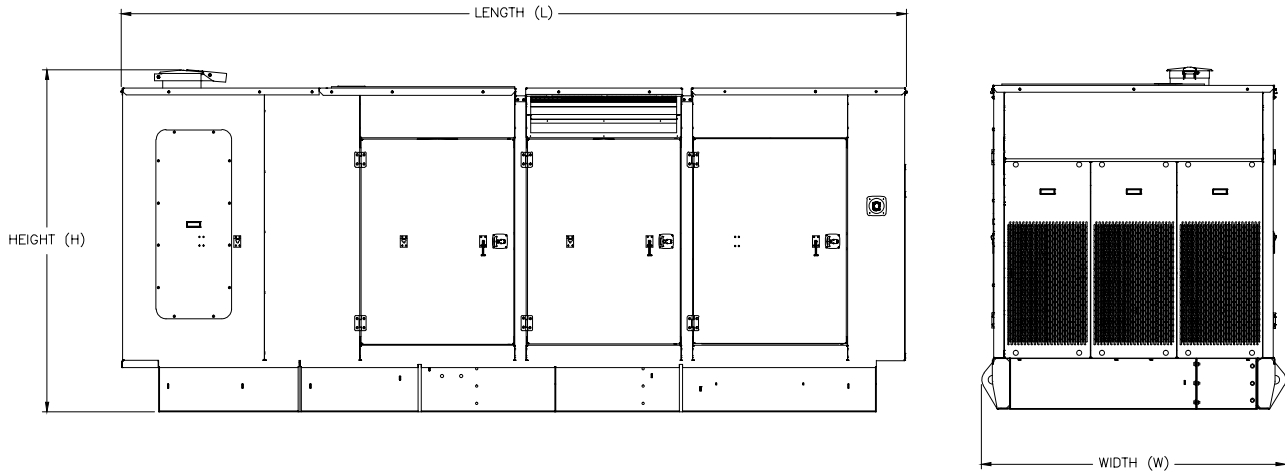

Model	Standby ekW	Length "L"		Width "W"		Height "H"	
		mm	in	mm	in	mm	in
C13	350	6382	251.2	2056	80.9	3209	126.3
	400						
C15	350	6382	251.2	2056	80.9	3209	126.3
	400						
	450						
	500						
C18	550	7271	286.2	2056	80.9	3151	124.1
	600						

www.Cat-ElectricPower.com

©2016 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice. CAT, CATERPILLAR, their respective logos ACERT, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.